


# Blackmagic Web Presenter



Blackmagic Web Presenter makes any SDI or HDMI video source appear as a USB webcam for higher quality web streaming using software such as Skype or streaming platforms such as YouTube Live, Facebook Live, Twitch.tv, Periscope and more! Blackmagic Web Presenter includes 12G-SDI and HDMI inputs, XLR microphone input, HiFi audio input, Teranex quality down conversion and a 2 input live switcher when used with the optional Teranex Mini Smart Panel.

**\$495**

## Connections

### SDI Video Inputs

1

### SDI Video Outputs

1x program out, 1x loop out.

### SDI Rates

270Mb, 1.5G, 3G, 6G, 12G

### HDMI Video Inputs

1

### HDMI Video Outputs

1x loop out

### Analog Video Inputs

None

### Analog Video Outputs

None

### Analog Audio Inputs

1x XLR.2 x RCA HiFi.

### Analog Audio Outputs

None

### Timecode Connection

None

### Reference Input

None

### RCA

2 X HiFi Analog audio input

### XLR

1 X input supporting both microphone and line levels

### USB Webcam

1

### HDMI 2.0


1 X Input, 1 X loop out, (2 channel embedded audio)

### USB 2.0

1 X Type B

### Mini USB

1 X for software updates

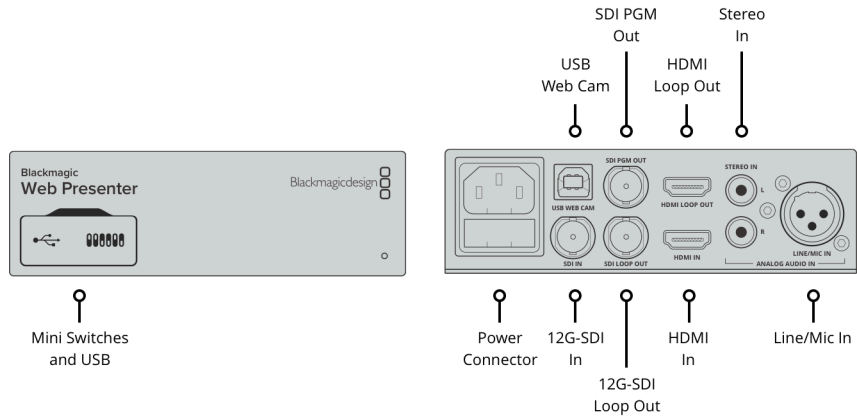

## Standards

### Streaming Video Standards

720p over USB.

### HDMI Video Standards

#### SD Video Standards

525i59.94 NTSC, 625i50 PAL

#### HD Video Standards

720p50, 720p59.94, 720p60  
 1080p23.98, 1080p24, 1080p25,  
 1080p29.97, 1080p30, 1080p50,  
 1080p59.94, 1080p60  
 1080i50, 1080i59.94, 1080i60

#### Ultra HD Video Standards

2160p23.98, 2160p24, 2160p25,  
 2160p29.97, 2160p30, 2160p50,  
 2160p59.94, 2160p60

### 12G SDI Video Standards

#### SD Video Standards

525i59.94 NTSC, 625i50 PAL

#### HD Video Standards

720p50, 720p59.94, 720p60  
 1080p23.98, 1080p24, 1080p25,  
 1080p29.97, 1080p30, 1080p50,  
 1080p59.94, 1080p60  
 1080PsF23.98, 1080PsF24,  
 1080PsF25, 1080PsF29.97, 1080PsF30  
 1080i50, 1080i59.94, 1080i60

#### 2K Video Standards

None

#### Ultra HD Video Standards

2160p23.98, 2160p24, 2160p25,  
 2160p29.97, 2160p30, 2160p50,  
 2160p59.94, 2160p60

#### 4K Video Standards

None

## Hardware Frame Buffer

Supports any USB UVC and UAC webcam video drivers.

---

## Computer Capture

USB webcam for Mac, Windows, Linux and any operating system that supports 720p HD webcams.

---

## Control

### Basic Settings Control

Mini Switches.

### Built in Control Panel

None. Supports Teranex Mini Smart Panel with 2.2 inch color display for video preview, audio meters and status.

### Optional Front Panel Control

Front mounted Smart Panel with LCD, rotary knob and six settings buttons

### Device Control

None

---

## Software

### Compatible Services and Software

YouTube Live, Facebook Live, Twitch.tv, Periscope, Skype, Open Broadcaster and XSplit Broadcaster.

---

## Operating Systems



Mac 10.13 High Sierra,  
Mac 10.14 Mojave or later.



Windows 8.1 or Windows 10.



Chrome OS



Linux

---

## Power Requirements

### Power Supply

1 x Internal 90-240V AC.

### Power Consumption

24 watts

---

---

## Physical Specifications



---

## Environmental Specifications

**Operating Temperature:**

5° C to 50° C (41° - 122°F)

**Storage Temperature:**

-20° to 60° C (-4° to 140° F)

**Relative Humidity:**

0% to 90% non-condensing

---

## What's Included

Web Presenter

SD card with software and manual

---

## Warranty

3 year Limited Manufacturer's  
Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2019, all rights reserved.  
All trademarks are property of their respective owners. MSRP excludes sales taxes/duties and shipping costs.  
This website uses remarketing services to advertise on third party websites to previous visitors to our site.  
You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller